

## Bonus Station



Model: LTV-D1


DC: 083017

### Power

1. Insert 2- AAA batteries into your station according to polarity.
2. Insert 2- AA batteries into your sensor according to polarity.
3. Set time.

**Note:** As this is a bonus station, not sold on it's own, you likely already have set up your thermo-hygro sensor.

**Note:** Thermo-hygro sensor not included, unless purchased as a set with a compatible station.

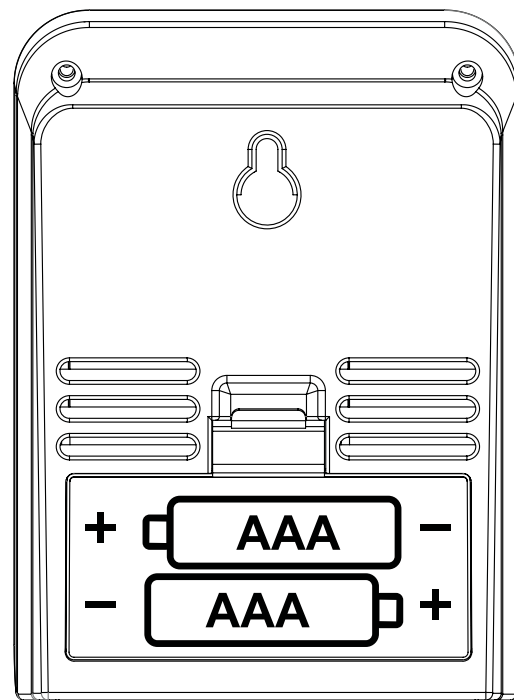

## Set time


- Hold the SET/IN-OUT button for 3 seconds to enter setting menu
- Press and release SET/IN-OUT button to move to next item
- Press and release +/SEARCH button to increase settings
- Hold +/Search to adjust quickly

### Setting order:

- 12/24 Hour Time
- Hour
- Minutes
- Fahrenheit/Celsius


1. Hold the SET/IN-OUT button for 3 seconds. 12Hr will flash.
2. Press and release the +/SEARCH button if you want 24 hour time.
3. Press and release SET/IN-OUT to confirm and the hour will flash.
4. Press and release the +/SEARCH button to set the hour.
5. Press and release SET/IN-OUT to confirm and the minutes will flash.
6. Press and release the +/SEARCH button set the minutes.
7. Press and release SET/IN-OUT to confirm and °F (Fahrenheit) will flash.
8. Press and release the +/SEARCH button if you want Celsius.
9. Press and release SET/IN-OUT to confirm and exit.

**Note:** If no buttons are pressed in a 20 seconds period, set mode will time out and return to live display mode, reflecting whatever adjustments were made by user before timed out.

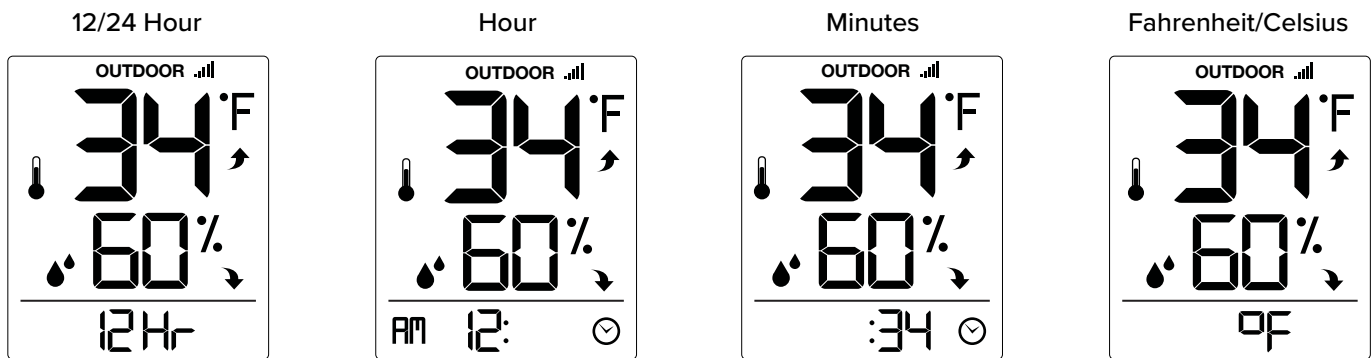

## Display Indoor or Outdoor Readings

Press and release the SET/IN-OUT button to switch between Indoor and Outdoor readings.

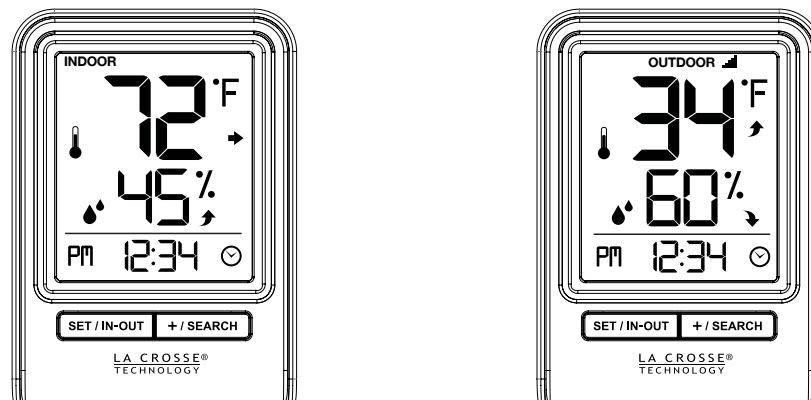

## Search for Outdoor Sensor . . .

- Hold the +/SEARCH button for 3 seconds to search for the outdoor sensor.
- If the signal is lost, station will display the LAST DATA recorded for 10 minutes, after that 10 minutes, the station will display dashes "--".
- After 30 minutes, station starts looking for the sensor automatically.

## Low Battery Icons

- Battery icon near outdoor temperature, change batteries in the outdoor sensor.
- Battery icon near time, change batteries in the temperature station.

## Let's Be Social!

### JOIN THE CONVERSATION

Follow us on our social media outlets for the latest promotions, product support, and awesome giveaways.



## Help Us, Help You!

If you have ideas for features or support solutions you'd like to see us make, please let us know! We truly want to make owning a La Crosse Technology product not only a practical experience, but also a fun one. So email us at: [store@lacrossetechnology.com](mailto:store@lacrossetechnology.com)

## Specifications

- Indoor Temperature: 32 F to 122F (0C to 50C)
- Indoor Humidity: 10% RH to 99%
  
- Outdoor Temperature: -40 F to 140F (-40C to 60C)
- Outdoor Humidity: 10% RH to 99%
  
- Transmission Range: 400 ft (121 m) RF 915MHz open air
  
- Batteries: 2-AAA, IEC, LR3 batteries (not included)
- Battery Life: over 24 months with reputable batteries
  
- Dimensions: 2.64" L x 1.32" W x 3.62" H ( 6.7 cm L x 3.35cm W x 9.19cm H)

## Warranty and Support

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship. Before returning a product, please contact our friendly customer support with questions or visit our online help:

Phone: 1-608-782-1610

Online Product Support and Registration: [www.lacrossetechnology.com/support](http://www.lacrossetechnology.com/support)

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

### **Operation is subject to the following two conditions:**

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### **Caution!**

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences.

All trademarks and patents are recognized.